

Fiber Optic Transflection Probe



FlexiSpec®

On-line transmission spectroscopy in liquids at long distance

High throughput in any part of UV -VIS and VIS-NIR spectra

Flexible and robust for industrial applications in harsh environment

Compatible with all fiber optic spectrometers


FlexiSpec® product line includes the latest generation of TransFlex (dual pass) fiber optic probes to be used with any fiber optic spectrometer or photometer.

FlexiSpec® Dual Pass fiber optic probes are compatible with process-interfaces to be cleanable and to enable reaction monitoring in lab, pilot plant and run full automated process control.

Applications:

- Reaction monitoring in real time
- Process Analytical Technologies (PAT)
- Crystallization Development
- & Screening
- Analytical Characterization
- Biopharmaceutical Analysis
- Biofuel Development & Production

Transmission spectra of different samples

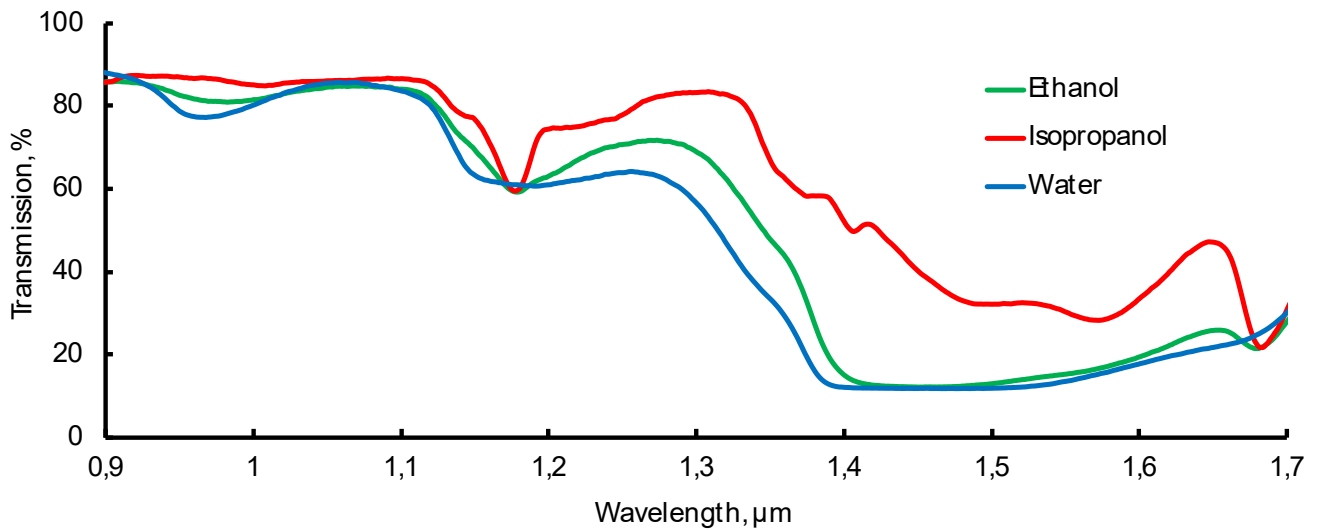


Specification of Fiber Optic Transfection Probes FlexiSpec®

Fiber type	Silica UV-VIS	Silica VIS-NIR
Operating spectral range	0.2 - 1.3 μm	0.4 - 2.2 μm
Gap (optical path)	2; 5; 10 mm (4; 10; 20 mm)	
Temperature range	$\leq 200^\circ\text{C}$	
Minimum bending radius	120 mm (for 600 μm core fiber)	

Common Parameters of Fiber Optic Transfection Probes FlexiSpec®

Total Length	2.0 m (opt. 1 - 30 m)
Shaft Length	200 mm (opt. 50 - 500 mm)
Shaft Diameter	12 mm
Shaft Material	Stainless steel, Hastelloy C22
Protective Tube Material	Liquide Tight SST-Conduit, KOPEX-Tube
Input / Output Connectors	SMA; FC/PC; ST



artphotronics.com

art photonics GmbH
Rudower Chaussee 46
12489 Berlin Germany

Phone +49 (0) 30-6779 887-0
sales@artphotronics.com
www.artphotronics.com

QAS Int. - zertifiziert
DIN EN ISO 9001:2015
Zertifikat Nr. A1887GER

